


# 17" Multi-touch capacitive touchscreen monitor



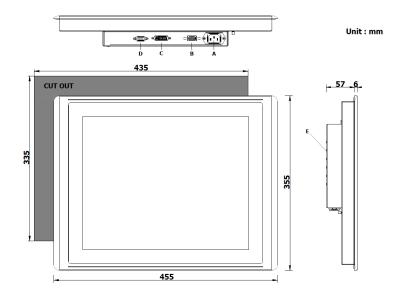

#### Dimensions - I/O View:

A - Power switch

B - USB (TOUCH RESERVED)

C - DVI-D

D - VGA

E - OSD KEYBOARD



DISPLAY	
TFT TYPE	17" TFT LCD
MAX RESOLUTION	1280x1024
LUMINANCE	350 cd/m <sup>2</sup>
CONTRAST RATIO	1000:1
VIEW ANGLE	85°/80°/85°/85° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Projected capacitive multi-touch control

TOUCH TYPE	Projected capacitive multi-touch control
EXTERNAL I/O	
USB PORTS	N/A
VIDEO INPUT	1x VGA connector, 1x DVI-D connector
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector
POWER SYSTEM	
RATED INPUT VOLTAGE	24 VDC 110-230 VAC
INPUT VOLTAGE LIMIT	22-32 VDC 90-264 VAC
	00 20 1 17 10



MECHANICAL	
DIMENSION	455x355x63 mm (18x14x2.5 in)
WEIGHT	4.5 Kg
FRONT PANEL	Aluminum frontal frame with 3 mm temperate
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100
END/IDONINAENT	
ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)

ENVIRONMENT	
OPERATING TEMPERATURE	0~50°C (32~122°F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE



# 17" Multi-touch capacitive touchscreen monitor

### FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo1

<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

#### Unit: mm

