


15" Resistive touchscreen monitor



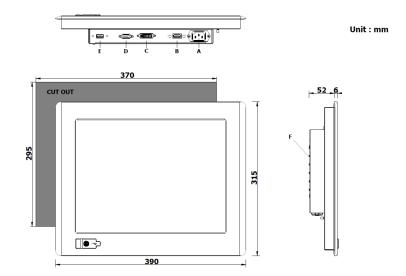

Dimensions - I/O View:

- Supply connector

- USB (touch reserved)


С - DVI-D

D - VGA

E - USB 2.0 (frontal port reserved)

F - OSD KEYBOARD





LOIVIII 47-1140L	000 ca/111		
CONTRAST RATIO	600:1		
VIEW ANGLE	80°/80°/80°/80° (L/R/U/D)		
MAX COLORS	16.7 Millions Five wire resistive		
TOUCH TYPE			
EXTERNAL I/O			
USB PORTS	1x USB 2.0 on front panel		
VIDEO INPUT	1x VGA connector, 1x DVI-D connector		
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector		
POWER SYSTEM			
RATED INPUT VOLTAGE	24 VDC 110-230 VAC		
INPUT VOLTAGE LIMIT	22-32 VDC 90-264 VAC		
POWER CONSUMPTION	15 W		

(P66)			B	(IP66)
-------	--	--	----------	--------

DIMENSION	390x315x58 mm (15.4x12.4x2.3 in)		
WEIGHT	4.0 Kg		
FRONT PANEL	Anodized aluminum		
CHASSIS	SECC steel (galvanized)		
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100		
ENVIRONMENT			
OPERATING TEMPERATURE	0~50°C (32~122°F)		
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)		
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)		
FRONT PANEL PROTECTION	IP66		
EMC	CE		
SAFETY	CE		



15" Resistive touchscreen monitor

FRONTAL PANEL OPTIONAL Frontal panel graphic customization area for logo¹

¹To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

Unit: mm

