

# PSR118-EP



Fanless 18.5" Industrial Panel PC with Intel® Core™ i3-7100T / i5-7500T / i7-7700T



## FEATURES

- Intel® Core™ i3-7100T / i5-7500T / i7-7700T
- 18.5" 1366x768 / 1920x1080 LCD display
- Resistive touch
- Front panel, IP66-compliant
- Dual Gigabit Ethernet
- Dual display support
- Wide DC power range 9-29 VDC
- Wide AC power range 110-230 VAC



## SYSTEM

CPU	Intel® Core™ i3-7100T Intel® Core™ i5-7500T Intel® Core™ i7-7700T
CHIPSET	Intel® Kaby Lake
GRAPHICS	Intel® Gen9 Graphics DX 11/12
MEMORY TYPE	2x DDR4 SO-DIMM 2133 MHz max 32 GB
AUDIO	High Definition Audio
ETHERNET	1x 10/100/1000 Mbps Intel® I210 1x 10/100/1000 Mbps Intel® I219V

## DISPLAY

TFT TYPE	18.5" TFT LCD
MAX RESOLUTION	1366x768 or 1920x1080
LUMINANCE	300 cd/m <sup>2</sup> or 350 cd/m <sup>2</sup>
CONTRAST RATIO	1000 : 1
VIEW ANGLE	85° / 85° / 80° / 80° or 89° / 89° / 89° / 89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Five wire resistive

## STORAGE

DEVICE	2x 2.5" SSD / HDD
--------	-------------------

## EXTERNAL I/O

SERIAL PORTS	2x COM (RS-232/422/485), 2x COM (RS-232)
USB PORTS	4x USB 3.0, 1x USB 2.0, 1x USB 2.0 on front panel
AUDIO	1x Line-Out, 1x Mic In
VIDEO OUTPUT	2x HDMI (4096x2160)
LAN	2x RJ45 Ethernet ports
PS2	N/A
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector

## EXPANSION SLOT

MINI-PCIE	1x half size with PCIe x1
mSATA	1x full size mSATA (shared with SATA3)

## OS SUPPORT

MICROSOFT®	Windows 10 Enterprise LTSC 2016 (64 bit)
MICROSOFT®	Windows 10 Enterprise LTSC 2019 (64 bit)
MICROSOFT®	Windows 10 PRO (64 bit)
LINUX	Ubuntu 20.04.1 LTS or newer and further distros

## POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC 110-230 VAC
INPUT VOLTAGE LIMIT	9-29 VDC 90-264 VAC
POWER CONSUMPTION	70 W (typical consumption)

## MECHANICAL


DIMENSION (WxHxD)	500x320x100 mm (19.7x12.6x3.9 in)
WEIGHT	9.5 Kg
FRONT PANEL	Anodized aluminum
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips

## ENVIRONMENT

OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F) 0 ~ 45 °C (32 ~ 113 °F) only for i7
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40 °C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

**Dimensions - I/O View :**

- A - Power switch
- B - Wi-fi antenna (optional)
- C - 1x USB 2.0
- D - RS-232/422/485 (COM 1)
- E - RS-232/422/485 (COM 2)
- F - RS-232 (COM 3)
- G - RS-232 (COM 4)
- H - Audio output
- J - Mic-in
- K - Gigabit LAN 2
- L - Gigabit LAN 1
- M - HDMI 3
- N - HDMI 2
- O - 2x USB 3.0
- P - 2x USB 3.0
- Q - Supply connector
- R - 1x USB 2.0
- S - Wi-fi antenna (optional)

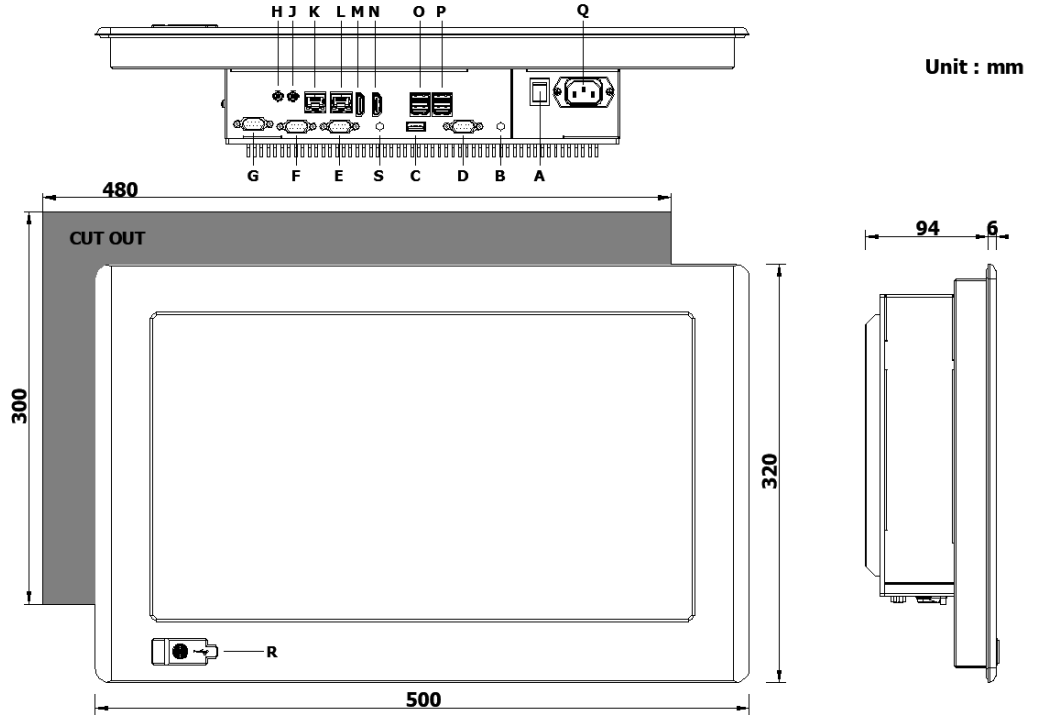

Unit : mm

AVAILABLE OPTIONS		CONFIGURATION NUMBER						
		1	2	3	4	5	6	7
<b>WiFi Lan</b>	Wi-Fi Lan <sup>1</sup>	●						
Notes								
<sup>1</sup> 1 mt Wi-Fi antenna cable extension available on request								

# PSR118-EP

Fanless 18.5" Industrial Panel PC with Intel® Core™ i3-7100T / i5-7500T / i7-7700T

## FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo<sup>1</sup>

<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel.  
Later we will send you a preview to be confirmed.

Unit : mm

