


PMG216

15.6" Multi-touch capacitive touchscreen monitor

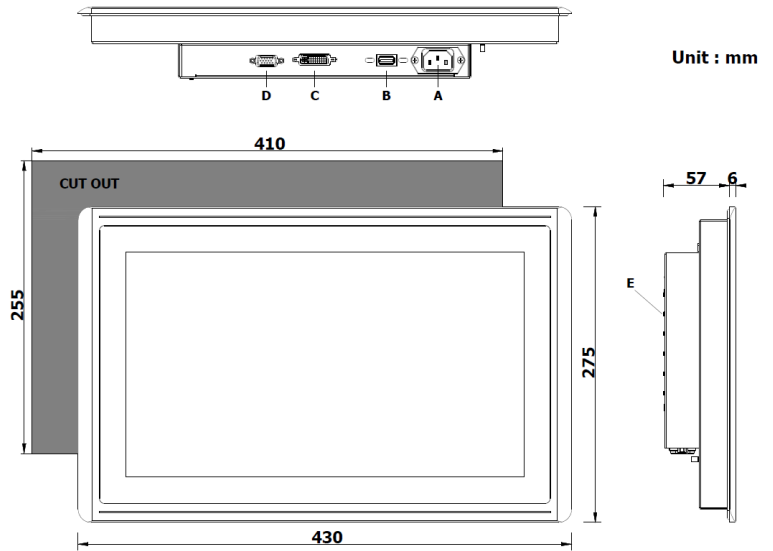

Dimensions - I/O View :

- A - Power switch
- B - USB (TOUCH RESERVED)
- C - DVI-D
- D - VGA
- E - OSD KEYBOARD



DISPLAY	
TFT TYPE	15.6" TFT LCD
MAX RESOLUTION	1366x768 or 1920x1080
LUMINANCE	300 cd/m ² or 500 cd/m ²
CONTRAST RATIO	500 : 1 or 1000:1
VIEW ANGLE	80° / 80° / 80° / 80° or 89° / 89° / 89° / 89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Projected capacitive multi-touch control

EXTERNAL I/O	
USB PORTS	N/A
VIDEO INPUT	1x VGA connector, 1x DVI-D connector
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector

POWER SYSTEM	
RATED INPUT VOLTAGE	24 VDC 110-230 VAC
INPUT VOLTAGE LIMIT	22-32 VDC 90-264 VAC
POWER CONSUMPTION	16 W

MECHANICAL	
DIMENSION (WxHxD)	430x275x63 mm (15.4x12.4x2.5 in)
WEIGHT	4.5 Kg
FRONT PANEL	Aluminum frontal frame with 3 mm temperate
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100

ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

PMG216

15.6" Multi-touch capacitive touchscreen monitor

FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo¹

¹To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel.
Later we will send you a preview to be confirmed.

Unit : mm

