

# PSR122-FM



Fanless 21.5" Industrial Panel PC with Intel® Celeron J1900



## FEATURES

- Intel® Celeron J1900
- 21.5" 1920x1080 LCD display
- Resistive touch
- Front panel, IP66-compliant
- Dual Gigabit Ethernet
- Dual display support
- Wide DC power range 9-36 VDC
- Wide AC power range 110-230 VAC



## SYSTEM

CPU	Intel® Celeron® J1900, QC, 2.0 GHz
CHIPSET	Intel® Baytrail
GRAPHICS	Intel® Gen7 Graphics DX 11, OGL 3.2
MEMORY TYPE	1x DDR3L SO-DIMM 1600 MHz max 8 GB
AUDIO	High Definition Audio
ETHERNET	2x Realtek 8111G 10/100/1000 Mbps

## DISPLAY

TFT TYPE	21.5" TFT LCD
MAX RESOLUTION	1920x1080
LUMINANCE	250 cd/m <sup>2</sup>
CONTRAST RATIO	3000 : 1
VIEW ANGLE	89° / 89° / 89° / 89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Five wire resistive

## STORAGE

DEVICE	2x 2.5" SSD / HDD
--------	-------------------

## EXTERNAL I/O

SERIAL PORTS	1x COM (RS-232/422/485), 3x COM (RS-232)
USB PORTS	2x USB 3.0, 2x USB 2.0, 1x USB 2.0 on front panel
AUDIO	1x Line-Out
VIDEO OUTPUT	1x VGA (1920x1200), 1x HDMI (1920x1200)
LAN	2x RJ45 Ethernet ports
PS2	N/A
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector

## EXPANSION SLOT

MINI-PCIE	1x half size with PCIe x1
MINI-PCIE / MSATA	1x full size shared with mSATA (SATA2)

## OS SUPPORT

MICROSOFT®	Windows Seven SP1 (32 / 64 bit)
MICROSOFT®	Windows Seven Embedded Standard (32 / 64 bit)
MICROSOFT®	Windows 10 Enterprise LTSC 2016 (32 / 64 bit)
MICROSOFT®	Windows 10 Enterprise LTSC 2019 (32 / 64 bit)
MICROSOFT®	Windows 10 PRO (32 / 64 bit)
LINUX	Ubuntu 20.04.1 LTS or newer and further distros

## POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC - 110-230 VAC
INPUT VOLTAGE LIMIT	9-36 VDC - 90-264 VAC
POWER CONSUMPTION	42 W

## MECHANICAL

DIMENSION (WxHxD)	579x367x95 mm (22.8x14.4x3.7 in)
WEIGHT	9 Kg
FRONT PANEL	Anodized aluminum
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips

## ENVIRONMENT


OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

# PSR122-FM

## Fanless 21.5" Industrial Panel PC with Intel® Celeron J1900

### Dimensions - I/O View :

- A - Power switch
- B - Audio output
- C - 2x USB 3.0
- D - Gigabit LAN 2
- E - Gigabit LAN 1
- F - VGA
- G - HDMI
- H - 1x USB 2.0
- J - 1x USB 2.0
- K - Gigabit LAN 3 (optional)
- L - RS-232 (COM 4)
- M - RS-232 (COM 3)
- N - RS-232 (COM 2)
- O - RS-232/422/485 (COM 1)
- P - Wi-fi antenna (optional)
- Q - Supply connector
- R - Removable SSD (optional)
- S - 1x USB 2.0

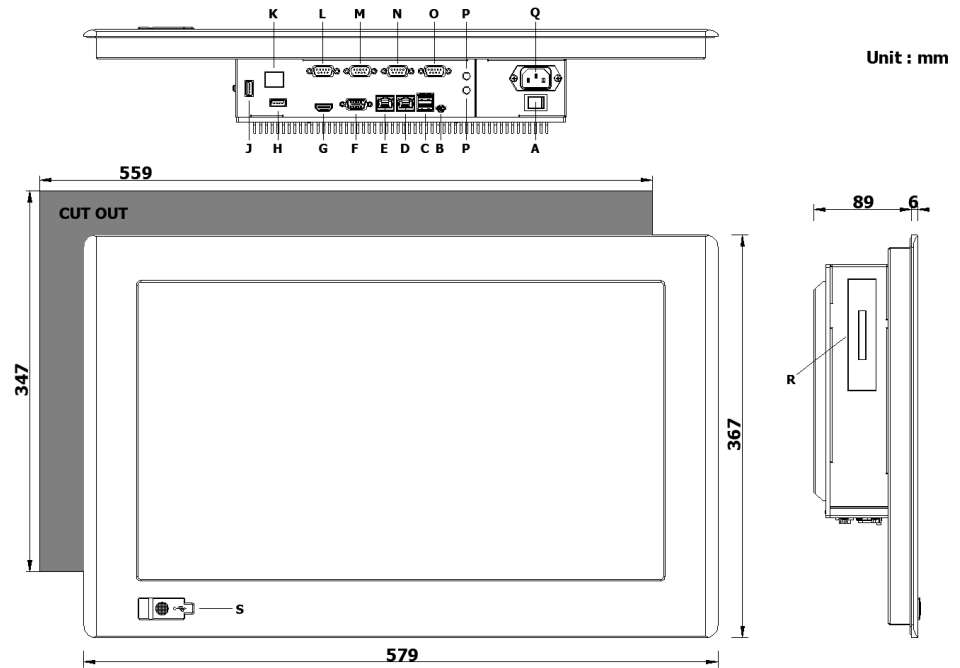

AVAILABLE OPTIONS		CONFIGURATION NUMBER						
		1	2	3	4	5	6	7
<b>WiFi Lan</b>	Wi-Fi Lan <sup>1</sup>	●			●	●		
<b>LAN</b>	1x RJ45 Gigabit Lan MiniPCI-Express card		●		●			
<b>Serial Ports</b>	2x optoisolated serial ports RS-422/485 MiniPCI-Express card <sup>2</sup>			●		●		
Notes								
<sup>1</sup> 1 mt Wi-Fi antenna cable extension available on request								
<sup>2</sup> Serial port will be set on the "M-L" position instead of RS232 COM3-COM4								

# PSR122-FM

Fanless 21.5" Industrial Panel PC with Intel® Celeron J1900

## FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo<sup>1</sup>



<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

Unit : mm

