



## 21.5" Resistive touchscreen monitor



### Dimensions - I/O View :

- A - Supply Connector
- B - USB (touch reserved)
- C - DVI-D
- D - VGA
- E - USB 2.0 (frontal port reserved)
- F - USB 2.0 (frontal port)
- G - OSD keyboard

Unit : mm

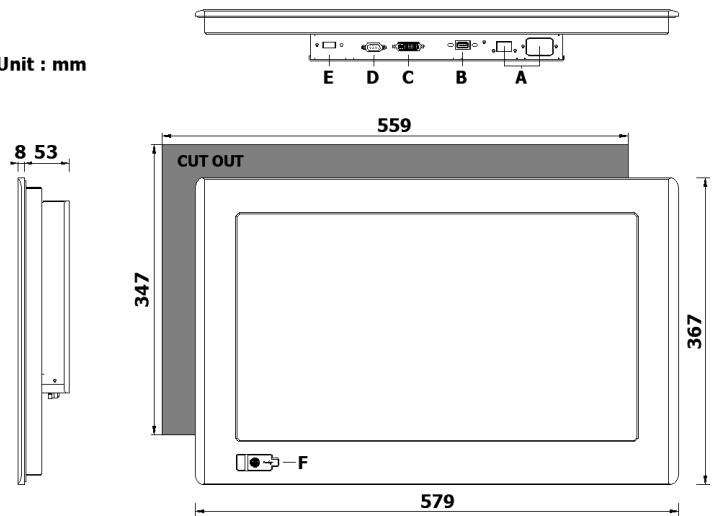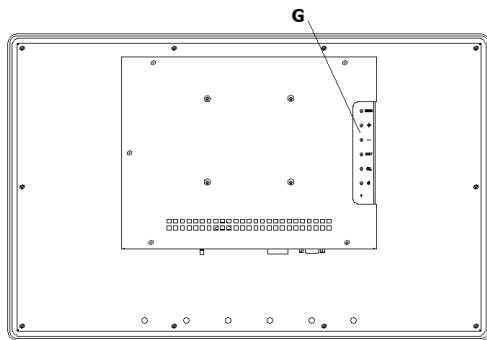

DISPLAY	
TFT TYPE	21.5" TFT LCD
MAX RESOLUTION	1920x1080
LUMINANCE	350 cd/m <sup>2</sup>
CONTRAST RATIO	3000 : 1
VIEW ANGLE	89° / 89° / 89° / 89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Five wire resistive
EXTERNAL I/O	
USB PORTS	1x USB 2.0 on front panel
VIDEO INPUT	1x VGA connector, 1x DVI-D connector
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector
POWER SYSTEM	
RATED INPUT VOLTAGE	24 VDC 110-230 VAC
INPUT VOLTAGE LIMIT	22-32 VDC 90-264 VAC
POWER CONSUMPTION	24 W

MECHANICAL	
DIMENSION (WxHxD)	579x367x61 mm (22.8x14.4x2.3 in)
WEIGHT	7.5 Kg
FRONT PANEL	Anodized aluminum
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100
ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

## 21.5" Resistive touchscreen monitor

### FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo<sup>1</sup>



<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

Unit : mm

