


## REMOTE up to 100m 17" Resistive touchscreen monitor



### MONITOR

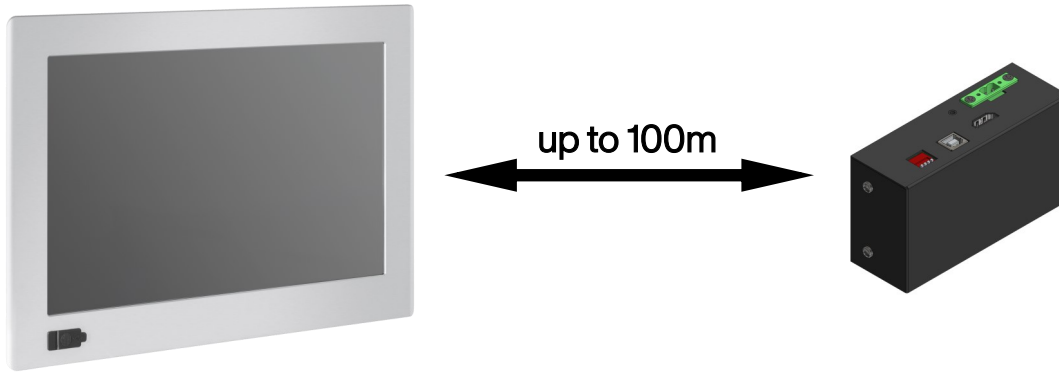

#### DISPLAY

TFT TYPE	17" TFT LCD
MAX RESOLUTION	1280x1024
LUMINANCE	250 cd/m <sup>2</sup>
CONTRAST RATIO	1000 : 1
VIEW ANGLE	85° / 85° / 80° / 80° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Five wire resistive

#### EXTERNAL I/O AND CABLE

CONNECTION	Cat5e/6/7 cable up to 100m
REMOTE INPUT	Ethernet cable connector
USB PORTS	1x USB 2.0, 1x USB 2.0 on frontal panel
SUPPLY CONNECTION	24 VDC terminal block

#### POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC
INPUT VOLTAGE LIMIT	22-32 VDC
POWER CONSUMPTION	16 W

#### MECHANICAL

DIMENSIONS (WxHxD)	455x355x64 mm (18x14x2.5 in)
WEIGHT	4.5 Kg
FRONT PANEL	Anodized aluminum
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100

#### ENVIRONMENT

OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

### TRANSMITTER



#### EXTERNAL I/O AND CABLE

CONNECTION	Cat5e/6/7 cable up to 100m
REMOTE OUTPUT	Ethernet cable connector
SUPPLY CONNECTION	24 VDC terminal block

#### POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC
INPUT VOLTAGE LIMIT	15-35 VDC
POWER CONSUMPTION	2.5 W


#### MECHANICAL

DIMENSIONS (WxHxD)	115x65x40 mm (4.5x2.6x1.6 in)
WEIGHT	0.2 Kg
CHASSIS	Painted steel
MOUNTING TYPE	DIN RAIL mounting, FLAT mounting

#### ENVIRONMENT



OPERATING TEMPERATURE	0 ~ 45 °C (32 ~ 123 °F)
STORAGE TEMPERATURE	-20 ~ 70 °C (-4 ~ 158 °F)
OPERATING HUMIDITY	10 ~ 90 % @ 40°C (non-condensing)
EMC	CE
SAFETY	CE

## REMOTE up to 100m 17" Resistive touchscreen monitor


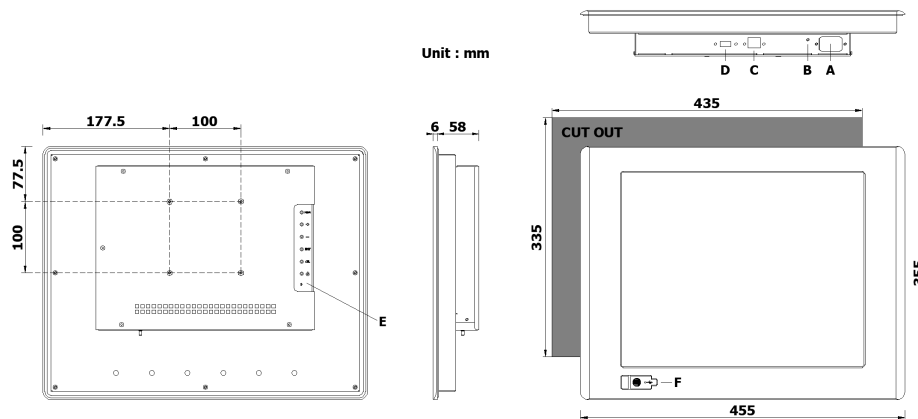


### MONITOR Dimensions - I/O View :


- |                         |                            |
|-------------------------|----------------------------|
| A - Supply Connector    | D - USB 2.0                |
| B - Ground Connector    | E - OSD Keyboard           |
| C - LAN Remote Receiver | F - USB 2.0 (frontal port) |

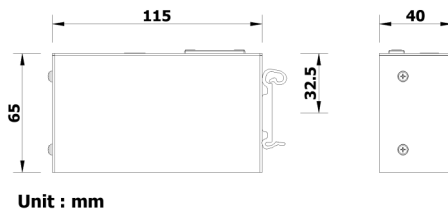

**DIN RAIL mounting**  
(included in the package)

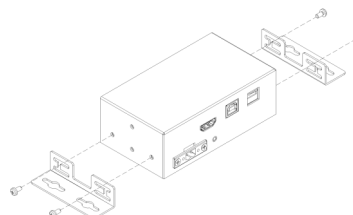

**FLAT mounting**  
(included in the package)

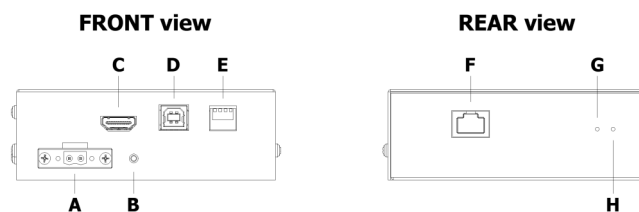

### TRANSMITTER Dimensions - I/O View - Mounting types :

- |                              |                            |
|------------------------------|----------------------------|
| A - Supply Connector (24VDC) | E - Channel ID             |
| B - Ground Connector         | F - LAN Remote Transmitter |
| C - HDMI                     | G - Link LED               |
| D - USB 2.0                  | H - Power LED              |

REMOTE up to 100m 17" Resistive touchscreen monitor

## FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo<sup>1</sup>



<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

Unit : mm

