


REMOTE up to 100m 18.5" Resistive touchscreen monitor



MONITOR

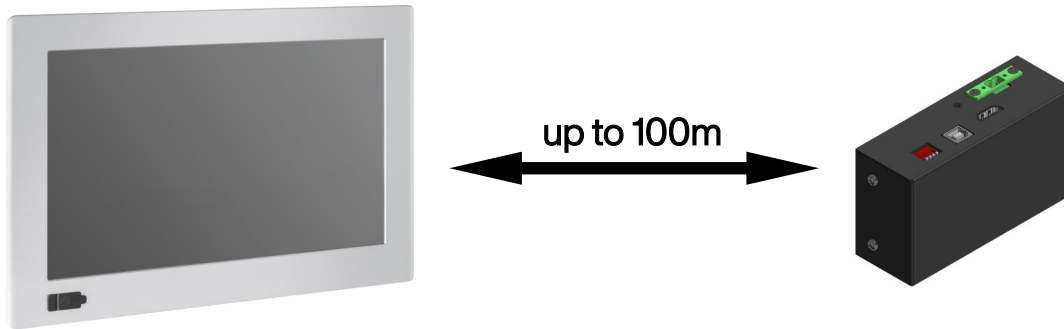

DISPLAY	
TFT TYPE	18.5" TFT LCD
MAX RESOLUTION	1366x768 or 1920x1080
LUMINANCE	300 cd/m ² or 350 cd/m ²
CONTRAST RATIO	1000 : 1
VIEW ANGLE	85° / 85° / 85° / 85° or 89° / 89° / 89° / 89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Five wire resistive

EXTERNAL I/O AND CABLE	
CONNECTION	Cat5e/6/7 cable up to 100m
REMOTE INPUT	Ethernet cable connector
USB PORTS	1x USB 2.0, 1x USB 2.0 on frontal panel
SUPPLY CONNECTION	24 VDC terminal block

POWER SYSTEM	
RATED INPUT VOLTAGE	24 VDC
INPUT VOLTAGE LIMIT	22-32 VDC
POWER CONSUMPTION	24 W

MECHANICAL	
DIMENSIONS (WxHxD)	500x320x64 mm (19.7x12.6x2.5 in)
WEIGHT	7.0 Kg
FRONT PANEL	Anodized aluminum
CHASSIS	SECC steel (galvanized)
MOUNTING TYPE	Panel mounting with retaining clips or VESA 100

ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	IP66
EMC	CE
SAFETY	CE

TRANSMITTER




EXTERNAL I/O AND CABLE	
CONNECTION	Cat5e/6/7 cable up to 100m
REMOTE OUTPUT	Ethernet cable connector
SUPPLY CONNECTION	24 VDC terminal block

POWER SYSTEM	
RATED INPUT VOLTAGE	24 VDC
INPUT VOLTAGE LIMIT	15-35 VDC
POWER CONSUMPTION	2.5 W

MECHANICAL	
DIMENSIONS (WxHxD)	115x65x40 mm (4.5x2.6x1.6 in)
WEIGHT	0.2 Kg
CHASSIS	Painted steel
MOUNTING TYPE	DIN RAIL mounting, FLAT mounting



ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 45 °C (32 ~ 123 °F)
STORAGE TEMPERATURE	-20 ~ 70 °C (-4 ~ 158 °F)
OPERATING HUMIDITY	10 ~ 90 % @ 40°C (non-condensing)
EMC	CE
SAFETY	CE

REMOTE up to 100m 18.5" Resistive touchscreen monitor


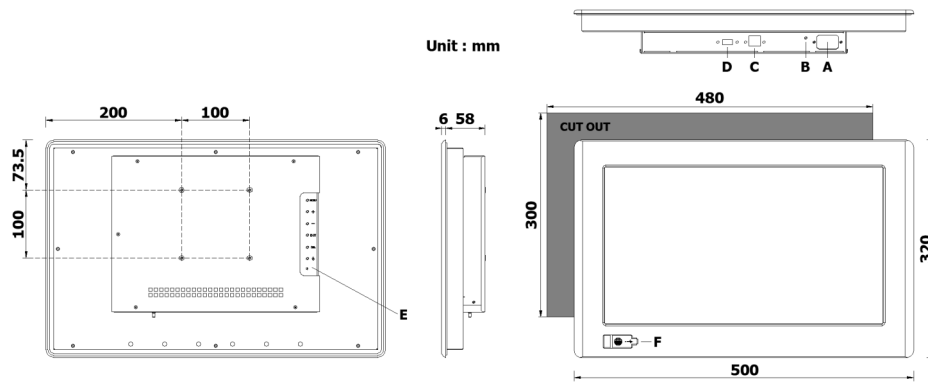


MONITOR Dimensions - I/O View :


- | | |
|-------------------------|----------------------------|
| A - Supply Connector | D - USB 2.0 |
| B - Ground Connector | E - OSD Keyboard |
| C - LAN Remote Receiver | F - USB 2.0 (frontal port) |

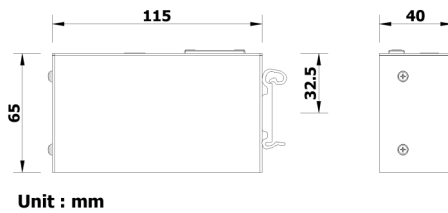

DIN RAIL mounting
(included in the package)

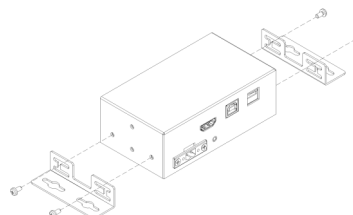

FLAT mounting
(included in the package)

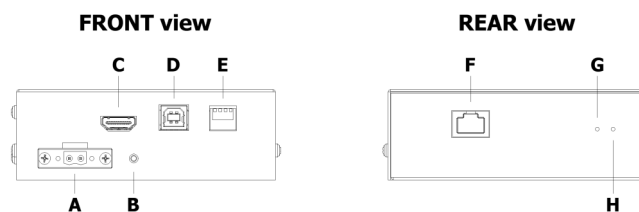

TRANSMITTER Dimensions - I/O View - Mounting types :

- | | |
|------------------------------|----------------------------|
| A - Supply Connector (24VDC) | E - Channel ID |
| B - Ground Connector | F - LAN Remote Transmitter |
| C - HDMI | G - Link LED |
| D - USB 2.0 | H - Power LED |

PRR218

REMOTE up to 100m 18.5" Resistive touchscreen monitor

FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo¹

¹To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel. Later we will send you a preview to be confirmed.

Unit : mm

