

PAC216-FD



Fanless 15.6" Industrial ARM-PC with Intel® N97



FEATURES

- Intel® N97
- 15.6" 1366x768 / 1920x1080 LCD display
- Three kinds of mounting : VESA, ARM, STAND
- Landscape orientation
- Full IP65 protection grade
- PC set up for max 10 keys Ø 22 on the frontal panel
- Customizable frontal panel
- Wide DC power range 12-36 VDC



SYSTEM

CPU	Intel® N97, QC, 3.6 GHz
CHIPSET	Intel® Alder Lake
GRAPHICS	Intel® UHD Graphics
MEMORY TYPE	1x DDR5 SO-DIMM 4800 MHz max 16 GB
AUDIO	Realtek® ALC897
ETHERNET	2x Intel® I225V 2.5 GbE

DISPLAY

TFT TYPE	15.6" TFT LCD
MAX RESOLUTION	1366x768 or 1920x1080
LUMINANCE	300 cd/m ² or 500 cd/m ²
CONTRAST RATIO	500 : 1 or 1000:1
VIEW ANGLE	80° / 80°/80° / 80° or 89°/89°/89°/89° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Projected capacitive multi-touch control

STORAGE

DEVICE	1x 2.5" SSD / HDD
--------	-------------------

EXTERNAL I/O

SERIAL PORTS	1x COM (RS-232/422/485) 1x COM (RS-232/422/485) optional
USB PORTS	2x USB 3.2, 2x USB 2.0
AUDIO	1x Line-Out
VIDEO OUTPUT	2x HDMI (4096x2160)
LAN	2x RJ45 Ethernet ports
PS2	N/A
SUPPLY CONNECTION	24 VDC terminal block

EXPANSION SLOT

MINI-PCIE	1x full size with PCIe x1
M.2	1x Key E (2230), 1x Key M (2280) with PCIe x2

OS SUPPORT

MICROSOFT®	Windows 10 Enterprise LTSC 2019 (64 bit)
MICROSOFT®	Windows 10 Enterprise LTSC 2021 (64 bit)
MICROSOFT®	Windows 10 PRO (64 bit)
MICROSOFT®	Windows 11 Enterprise LTSC 2024 (64 bit)
MICROSOFT®	Windows 11 PRO (64 bit)
LINUX	Ubuntu 20.04.1 LTS or newer and further distros

POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC
INPUT VOLTAGE LIMIT	12-36 VDC
POWER CONSUMPTION	50 W

MECHANICAL

DIMENSION (WxHxD)	403x351x74 mm (15.9x13.8x2.9 in)
WEIGHT	7 Kg
FRONT PANEL	Aluminum frontal frame with 2 mm temperate glass
CHASSIS	Painted steel
MOUNTING TYPE	VESA 100 (four M5 holes)

ENVIRONMENT

OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F) 0 ~ 45 °C (32 ~ 113 °F) only for i7
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
FRONT PANEL PROTECTION	Full IP65
EMC	CE
SAFETY	CE


PAC216-FD



Fanless 15.6" Industrial ARM-PC with Intel® N97

Dimensions - I/O View :

- | | |
|----------------------------|---------------------------------------|
| A - 2x USB 2.0 | H - RS-232/422/485 (COM 2 - optional) |
| B - 2x USB 3.2 | J - Supply connector |
| C - 2x HDMI | K - Power button |
| D - Gigabit LAN 1 | L - Elements Ø 22 (optional) |
| E - Gigabit LAN 2 | M - Wi-fi antenna (optional) |
| F - Audio output | N - Wi-fi antenna (optional) |
| G - RS-232/422/485 (COM 1) | |

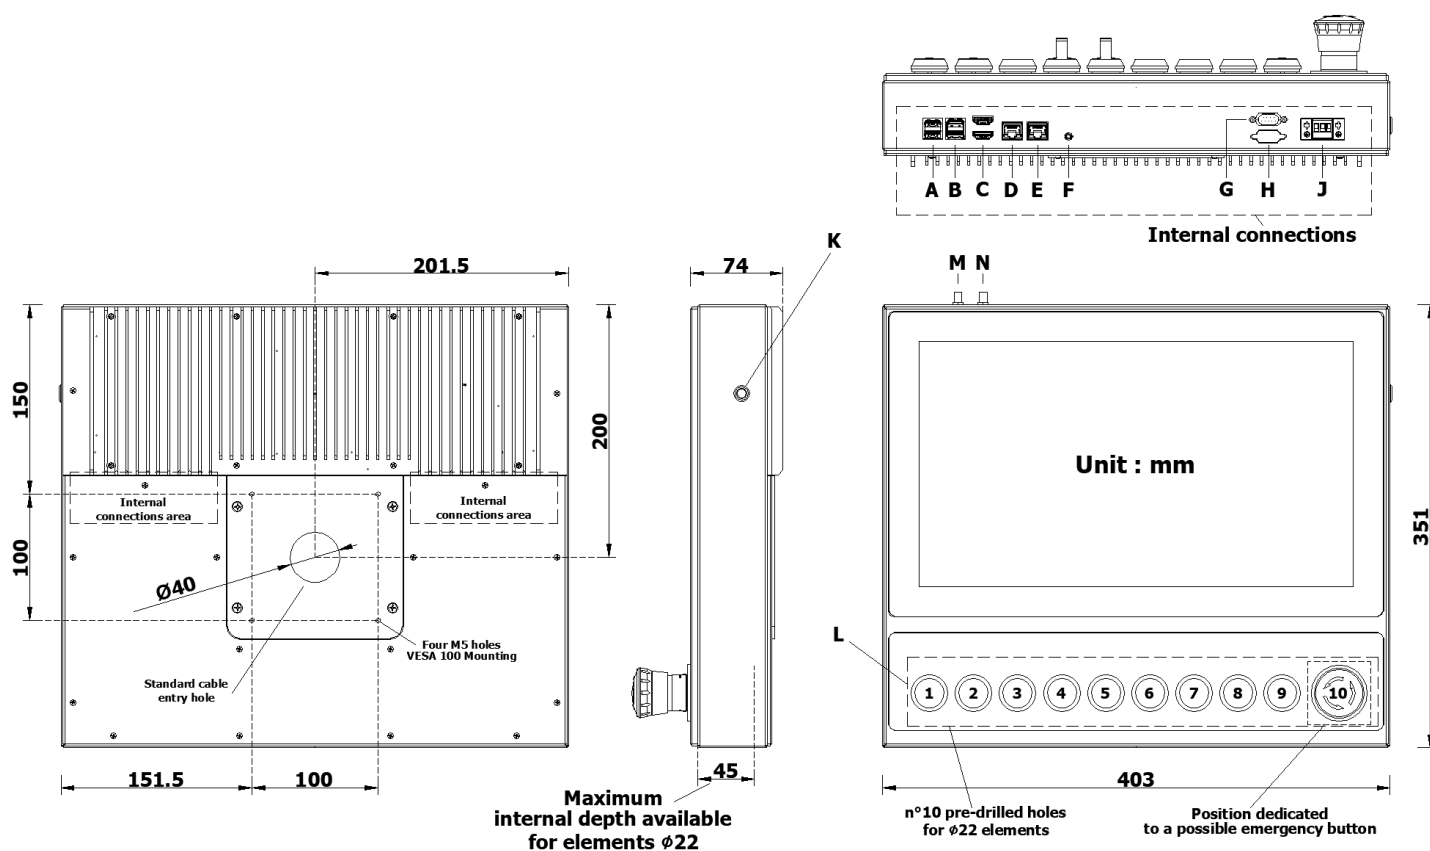


AVAILABLE OPTIONS		CONFIGURATION NUMBER						
		1	2	3	4	5	6	7
WiFi Lan	Wi-Fi Lan ¹	●		●				
Serial Ports	2x optoisolated serial ports RS-422/485 MiniPCI-Express card ²		●	●				
Notes								
¹ 1m Wi-Fi antenna cable extension available on request								
² Serial ports will be set on the "G-H" position instead of RS232 COM1-COM2								

PAC216-FD



Fanless 15.6" Industrial ARM-PC with Intel® N97

Rear View :

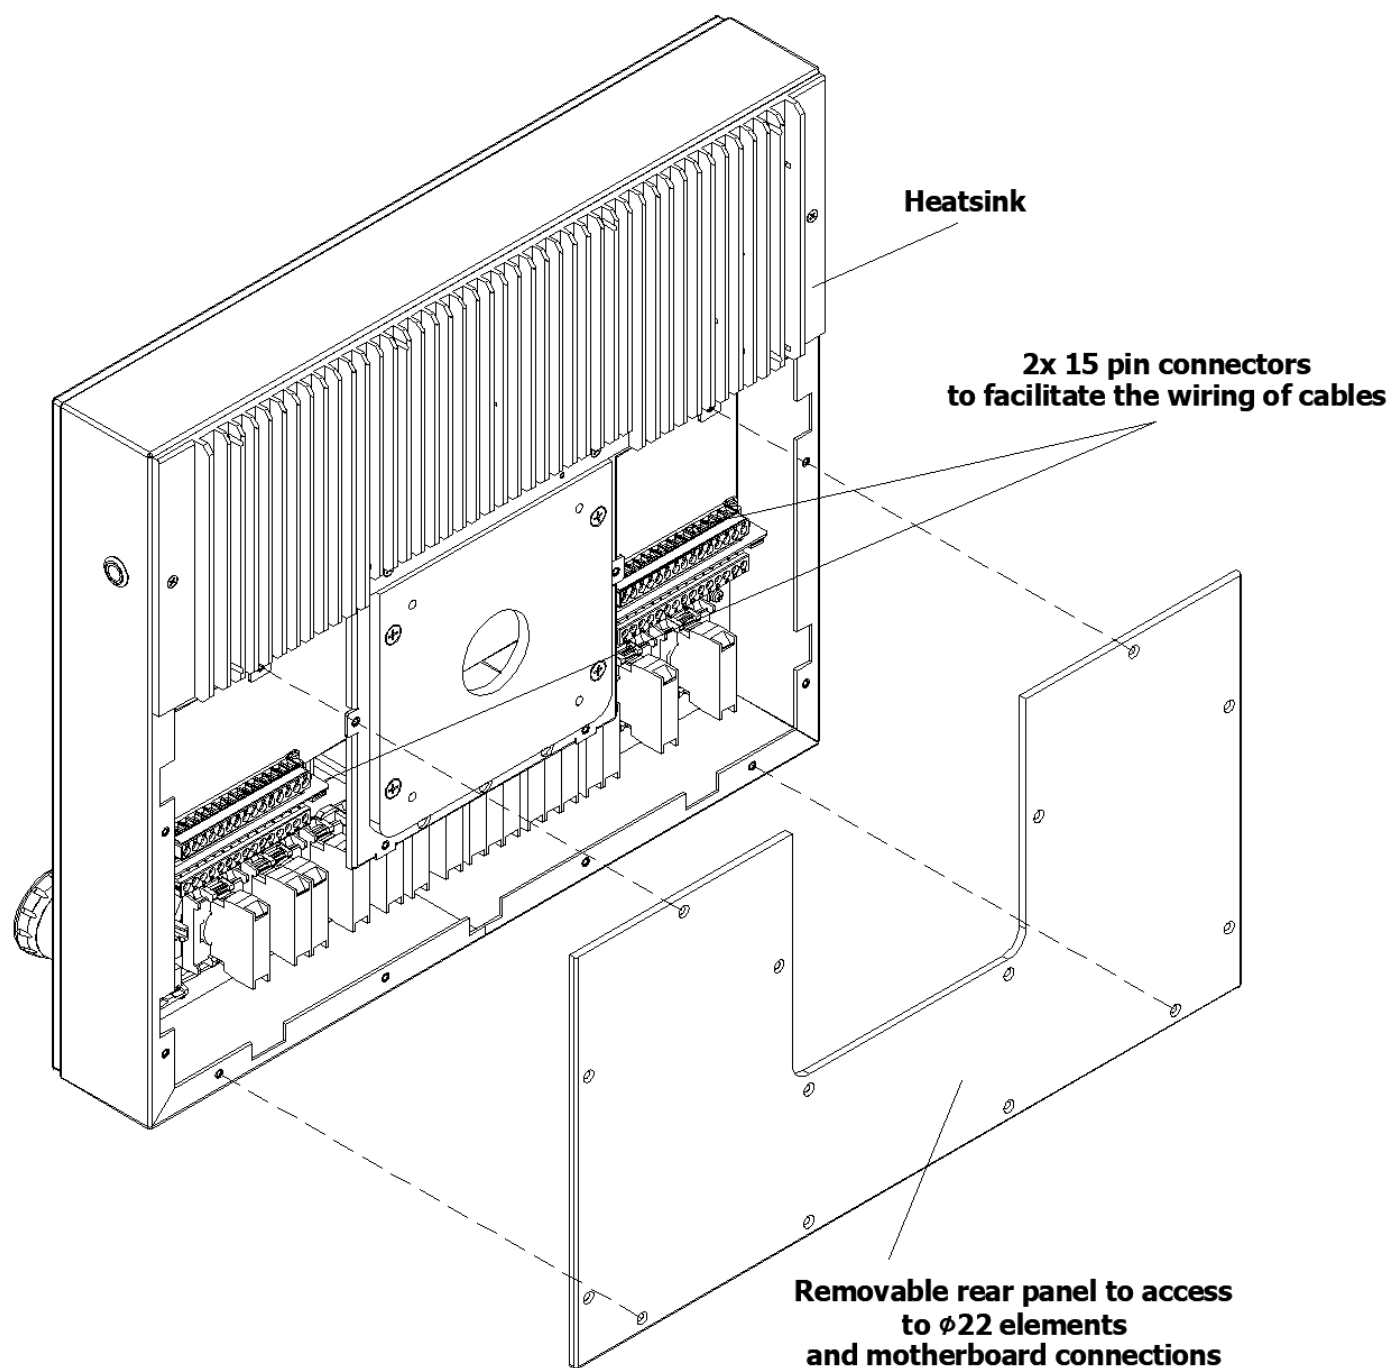

PAC216-FD



Fanless 15.6" Industrial ARM-PC with Intel® N97

FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo¹

¹ To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel.
Later we will send you a preview to be confirmed.

