

# PVG222-FD



Fanless 21.5" Industrial VESA PC with Intel® N97



## FEATURES

- Intel® N97
- 21.5" 1920x1080 LCD display
- Projected capacitive multi-touch control
- IP30-compliant
- Dual 2.5 Gigabit Ethernet
- Triple display support
- Wide DC power range 12-36 VDC
- Wide AC power range 85-264 VAC



## SYSTEM

CPU	Intel® N97, QC, 3.6 GHz
CHIPSET	Intel® Alder Lake
GRAPHICS	Intel® UHD Graphics
MEMORY TYPE	1x DDR5 SO-DIMM 4800 MHz max 16 GB
AUDIO	Realtek® ALC897
ETHERNET	2x Intel® I225V 2.5 GbE

## DISPLAY

TFT TYPE	21.5" TFT LCD
MAX RESOLUTION	1920x1080
LUMINANCE	250 cd/m <sup>2</sup>
CONTRAST RATIO	1000 : 1
VIEW ANGLE	85° / 80° / 88° / 85° (L/R/U/D)
MAX COLORS	16.7 Millions
TOUCH TYPE	Projected capacitive multi-touch control

## STORAGE

DEVICE	1x 2.5" SSD
--------	-------------

## EXTERNAL I/O

SERIAL PORTS	1x COM (RS-232/422/485) 1x COM (RS-232/422/485) optional 2x COM (RS-232) optional
USB PORTS	2x USB 3.2, 2x USB 2.0
AUDIO	1x Line-Out
VIDEO OUTPUT	2x HDMI (4096x2160)
LAN	2x RJ45 Ethernet ports
PS2	N/A
SUPPLY CONNECTION	24 VDC terminal block 110-230 VAC standard VDE connector

## EXPANSION SLOT

MINI-PCIE	1x full size with PCIe x1
M.2	1x Key E (2230), 1x Key M (2280) with PCIe x2

## OS SUPPORT

MICROSOFT®	Windows 10 Enterprise LTSC 2021 (64 bit)
MICROSOFT®	Windows 10 PRO (64 bit)
MICROSOFT®	Windows 11 Enterprise LTSC 2024 (64 bit)
MICROSOFT®	Windows 11 PRO (64 bit)
LINUX	Ubuntu 24.04.1 LTS or newer and further distros

## POWER SYSTEM

RATED INPUT VOLTAGE	24 VDC 110-230 VAC
INPUT VOLTAGE LIMIT	12-36 VDC 85-264 VAC
POWER CONSUMPTION	52 W

## MECHANICAL

DIMENSION (WxHxD)	550x340x87 mm (21.7x13.4x3.4 in)
WEIGHT	8,50 Kg
FRONT PANEL	Aluminum frontal frame with 3 mm temperate glass
CHASSIS	Black painted steel
MOUNTING TYPE	VESA mount 100

## ENVIRONMENT





OPERATING TEMPERATURE	0 ~ 50 °C (32 ~ 122 °F)
STORAGE TEMPERATURE	-20 ~ 60 °C (-4 ~ 140 °F)
OPERATING HUMIDITY	10 ~ 95 % @ 40°C (non-condensing)
PROTECTION GRADE	IP30
EMC	CE
SAFETY	CE

# PVG222-FD

## Fanless 21.5" Industrial VESA PC with Intel® N97

### Dimensions - I/O View :

- A - Power switch
- B - Supply connector
- C - 2x USB 2.0
- D - 2x USB 3.2
- E - 2x HDMI
- F - 2.5 Gigabit LAN 1
- G - 2.5 Gigabit LAN 2
- H - Audio output
- J - Gigabit LAN 3 (optional)
- K - RS-232 (COM 4 - optional)
- L - RS-232 (COM 3 - optional)
- M - RS-232/422/485 (COM 2 - optional)
- N - RS-232/422/485 (COM 1)
- O - Wi-fi antenna (optional)

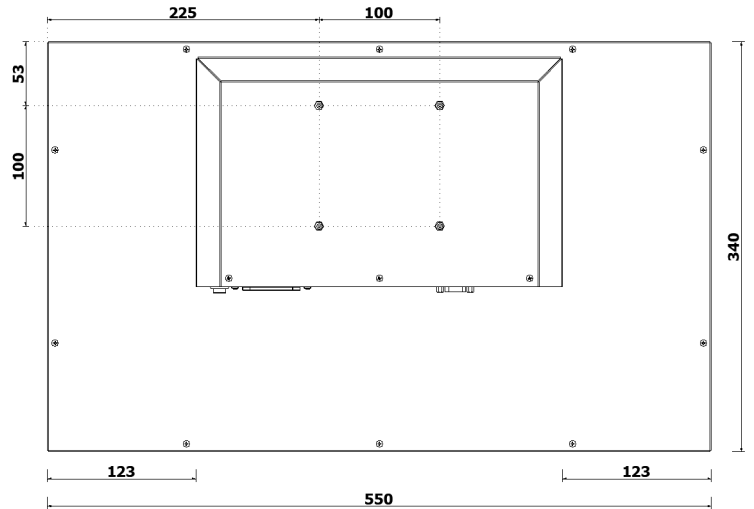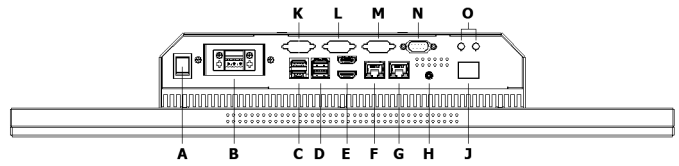

Unit : mm

AVAILABLE OPTIONS		CONFIGURATION NUMBER						
		1	2	3	4	5	6	7
<b>WiFi Lan</b>	Wi-Fi Lan <sup>1</sup>	●			●	●		●
<b>LAN</b>	1x RJ45 Gigabit Lan MiniPCI-Express card		●		●		●	●
<b>Serial Ports</b>	1x serial ports RS 232/422/485 and 2 RS 232( DB9)			●		●	●	●
Notes								
<sup>1</sup> 1 mt Wi-Fi antenna cable extension available on request								

# PVG222-FD

Fanless 21.5" Industrial VESA PC with Intel® N97

## FRONTAL PANEL OPTIONAL

Frontal panel graphic customization area for logo<sup>1</sup>

<sup>1</sup>To go on with the frontal panel customization, we need the vectorial logo and the logo spot on the panel.  
Later we will send you a preview to be confirmed.

